


MS5/12EIP-5 (E.146-AP)

Product summary:

Multiswitch with integrated power supply, passive terr. input, Quad LNB compatible

Brief description:

5in/12out standalone multiswitch for distribution of 4 SAT IF signals including passive terrestrial for up to 12 users

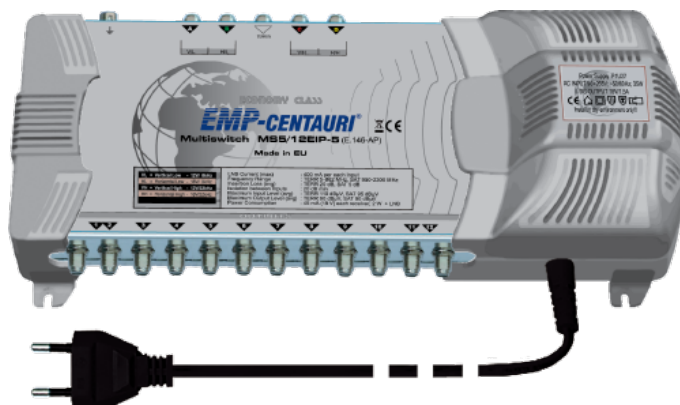

Technical data:

Parameter	Condition	Value
Frequency range	Sat. inputs	950-2150 MHz
	Terr. input	5-862 MHz,
	Outputs	5-2150 MHz,
Control		13/18 V + 0/22 kHz
Insertion loss	Sat.	0 dB avg
	Terr.	20 dB avg
Sat. inputs isolation		20 dB min
Maximum input level*	Sat.	90 dB μ V avg
	Terr.	100 dB μ V avg,
Maximum output level*	Sat.	90 dB μ V avg
	Terr.	80 dB μ V avg
Power consumption	From each receiver	40 mA
	From internal power supply	2 W + LNB
Dimensions (w,d,h)		34.7 x 15.2 x 8.7 cm (power cord length 130 cm)
Temperature range		-25 ~ +60 °C
Weight		1.230 kg

*Terr.: EN 50083-3/60dB IMA3 [dB μ V]; SAT: EN 50083-3/35dB IMA3 [dB μ V]